

ASC1204B-S Four Door Access Controller



Features

Interface

- Support 100,000 valid cards & 150,000 records
- Support multiple cards
- Support card, password, fingerprint and combination
- TCP/IP interface to PC
- Wiegand or RS-485 interface to readers(2/4 door)
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-passback, multi-door interlock, multi-card open
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting
- Surface mounted installation




lechnical Specification	
System	
Main Processor	32 Bit
Memory	16M
Input/Output Ports	
Input	Inputs x 9 (door sensor x 4, exit button x 4, alarm x 1)
Output	Relay x 5(door lock x 4, alarm x 1)
Reader	Reader x 4
Capacity	
Card holders/Events	100,000/150,000
Function	
Access control	Anti-pass back, Multi-interlock, Multi-card unlock
User Management	General, VIP, Guest, Patrol, Black list, Duress
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Period	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period


interface	
To PC	RJ45(10/100M)
To Reader	Wiegand/ RS485
Genreal	
RTC	Yes
Power Supply	DC12V/1A
Working Environment	-30°C~+60°C
Working Humidity	≤95%
Dimension(W×D×H)	210*51*106mm
Weight	0.5Kg

Technical Specification

ASC1204B-S


Dimensions






Application

Multi-door Management Four door controller

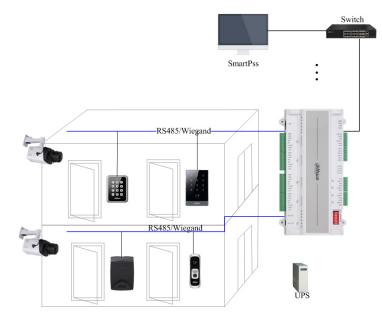

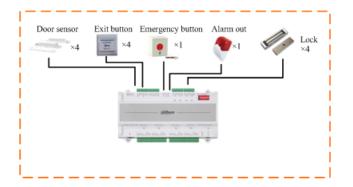



Rev 001.001 © 2016 Dahua . All rights reserved. Design and specifications are subject to change without notice