

DHI-ASC1202B-D

Two Door two way Access Controller



- Support 100,000 valid cards & 150,000 records.
- TCP/IP interface to PC.
- Support card, password, fingerprint and combination.
- Wiegand or RS-485 interface to readers (2 door).
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm.
- Anti-pass back, multi-door interlock, multi-card open.
- Support 128 efficient time and holiday schedules.
- Watch dog function ensure device free from halting.
- Surface mounted installation.



Technical Specification

System

Main Processor 32 Bit

Memory 16 M

Input/Output Ports

Input Inputs x 8 (door sensor x 2, exit button x 2, alarm x 4)

Output Relay x 6 (door lock x 2, alarm x 4)

Reader Reader x 4

Capacity

Card holders/Events 100,000/150,000

Function

Access control Anti-pass back, Multi-interlock, Multi-card unlock

User Management General, VIP, Guest, Patrol, Blocklist, Duress

Alarm Function Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm

Period Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period

Interface

To PC RJ45 (10/100M)

To Reader Wiegand26/34, RS485

General

RTC Yes

Power Supply DC 9-15V/300mA

Operating Temperature -30°C to +60°C

Working Humidity ≤95%

Dimension(W×D×H) 116.0mm×210.0mm×51.2mm

Weight 0.56 kg


Working Environment Indoor

Certificates

CE Yes

FCC Yes

Dimensions (mm[inch])

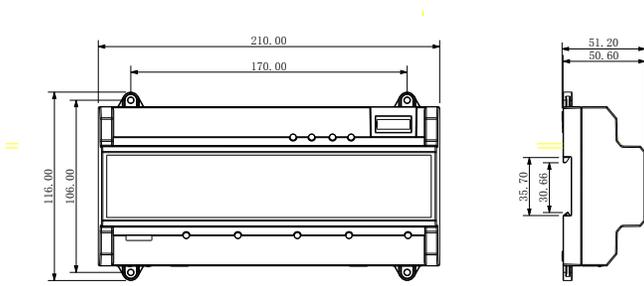

Application

Multi-door Management
Two door two way controller

