

DH-PFM920I-5EUN-N

305m UTP CAT5E Cable



Features

- 305m UTP CAT5E
- Support long distance PoE supply
- 99.99% OFC(oxygen free copper) Excellent material
- Environmentally friendly PVC
- 10-year warranty



Technical Specifications

Model		DH-PFM920I-5EUN-N
Conductor	Material	OFC(oxygen free copper)
	Composition	1/0.45
	Wire gauge	0.45*4P±0.01mm
Insulation	Material	HDPE
	Min. average thickness	0.2mm
	Diameter	0.83mm±0.03mm
	Color(4 Pairs)	Orange, white/orange; green, white/green; blue, white/blue; brown, white/brown
Jacket	Material	PVC
	Min. average thickness	0.5mm±0.1mm
	Diameter	4.7mm±0.2 mm
	Color	White
Length		305m (1000.66ft)
Max. DC resistance of single conductor		12 Ω/100m
Max. unbalance rate of line pairs' direct current resistance		12%
Min. insulation resistance		5000MΩ • km
Max. mutual capacitance		5.6NF/100m
Max. attenuation		22(dB/100m, 100MHz)
General	N.W.	7.3kg
	Packaging dimension	360mmx360mmx210mm
	Weight (with packaging)	8.1kg

Order Information

Type	Part Number	Description
Cable	DH-PFM920I-5EUN-N	305m UTP CAT5E cable _Dahua brand; Distribution

Dimensions (mm/inch)

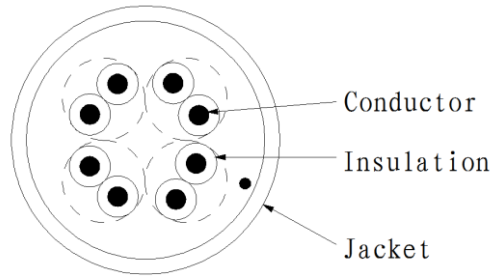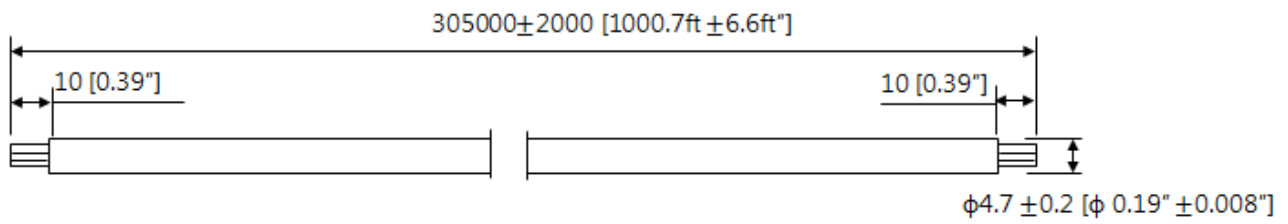

Package Information

- 305m UTP CAT5E cable *1