


LS490YXS-EF

49" FHD Video Wall Display Unit (Narrow Bezel 11.8mm)

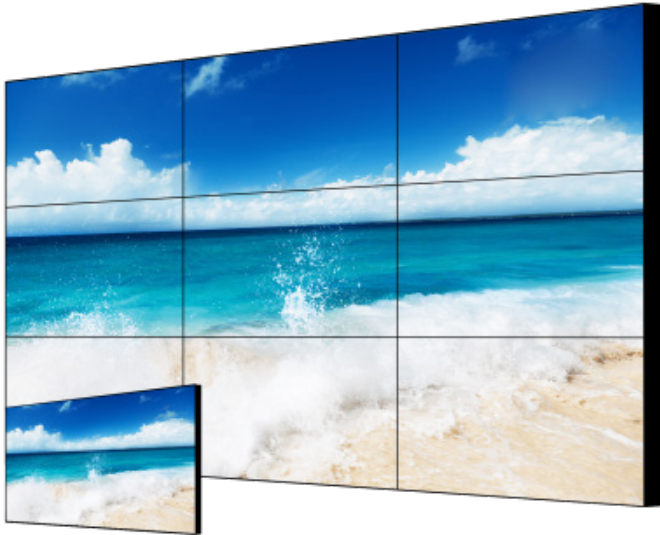

Features:

- Industrial level wide viewing angle panel, suitable for extensive 24/7 continuous works
- 11.8mm bezel-to-bezel design(5.9mm even panel bezel)
- Full high definition resolution, high image quality and no light-leaking
- Built-in 3D COMB filter and 3D Noise Reduction
- Built-in automatic ghost elimination function to protect the long-term use of LCD screen
- Professional thermal design to extend equipment lifespan.
- Abundant interfaces HDMI, DVI, VGA, BNC, USB, support video loop
- Infrared, RS232 dual mode, supporting remote PC control



Technical Specification

Model

Model	LS490YXS-EF
-------	-------------

System

Diagonal	49"(16:9)
Resolution	1920×1080 (FHD)
Bezel width	5.9mm(U/L/R/B)
Backlight	LED
Brightness/Luminance	380 cd/m ²
Contrast Ratio	1200:1
Pixel Density	46dpi
Viewing Angle	H178°, V178°
Response time	8ms
Display Color	8bit(16.7M)
VESA	400×400mm

Signals

Input	CVBS(BNC)×2, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×1	
Output	CVBS(BNC)×2, RS232×1	
	Speaker	10W×2

General

Consumption (Standard)	70W	
Consumption (Standby)	≤1W	
Power Supply	AC100V~AC240V, 50/60 Hz	
Installation Mode	Floor-standing, wall-mounted	
Control Mode	Infrared, RS232 dual mode, supporting remote PC control	
Gross Weight	27.8kg(61.3lb)	
Net Weight	15.0kg(33.1lb)	
Dimension (W×H×D)	1090.4mm×621.3mm×45.5mm(42.9"×24.5"×1.8")	
Package (W×H×D)	1265mm×850mm×270mm(49.8"×33.5"×10.6")	
Work Environment	Temperature	0℃~+50℃
	Humidity	20%RH~90%RH

Accessory

Standard	VGA cable, power cable, remote control
Optional	Pedestal, hanging bracket

Dimensions(mm)

