DHI-VTA7211B

Emergency Phone Tower

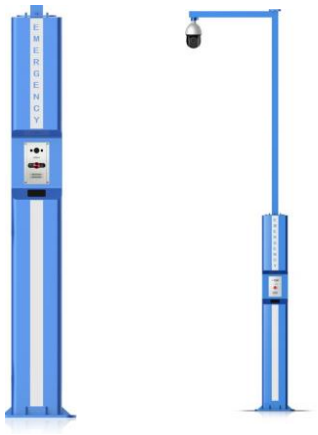

- Full HD CMOS camera
- Night vision
- Video & audio talk
- Remote monitor and broadcast
- Alarm integration
- Excellent vandal proof, IP65, IK10

Technical Specification

Mode	DHI-VTA7211B

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/3'' 2MP CMOS
Lens	2.8mm, H:120° V:70°
Day/Night	Auto(ICR)/Color/B/W
IR Distance	Distance up to 10 m
BLC Mode	WDR

Audio

Audio Compression	G.711
Audio Input	Built-in Omnidirectional Mic, pick-up distance: 5m
Audio Output	28 W Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Quality	Noise Reduction and echo cancellation

Operation Mode

Keypad	Single Mechanical Button
Reader	Mifare Card

Interface

Alarm In	2
Alarm Out	2
Alarm Lamp	1 Red Alarm lamp
Siren	110dB(optional: DH-VTAN30E)

Network

Ethernet	10M/100Mbps Self-adaptive
Fibre	100M/1000Mbps Self-adaptive
Network Protocol	TCP/IP

Extension

IP PTZ	Support
IP Dome	Support

General

Ingress Protection	IP65, IK10
Tamper Switch	Support
Memory Slot	Micro SD, Max 64G
Installation	Pole
Material	SGCC
Power	AC 100V-240V@47Hz-63Hz
Power Consumption	<80W
Working Environments	-30°C to +60°C
Relative Humidity	10%–90%RH
Dimensions	2200 mm × 280 mm × 300 mm (bracket not included) 4500 mm × 280 mm × 300 mm (bracket included) Communication system: 1400mm of the floor

Dimensions

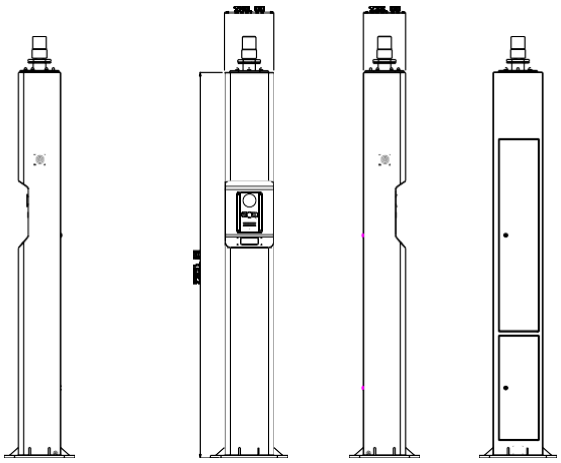

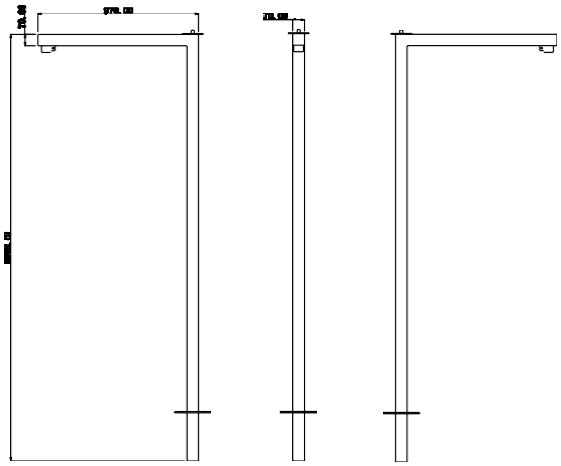

Application

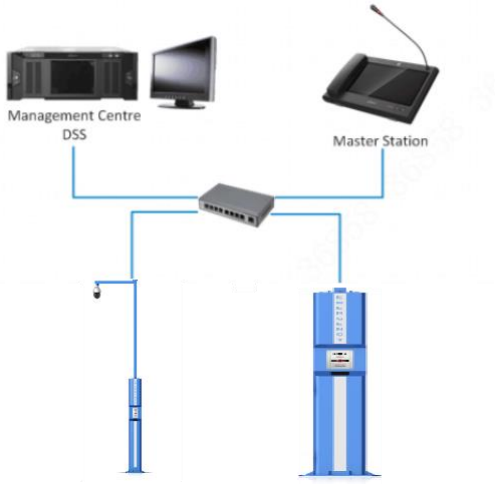

© 2020 Dahua. All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.