

Dimensioni	
d	
W	3840 (H)×2160 (V), 4K
Velocità Shutter elettronico	PAL: 1/3s-1/100000s NTSC: 1/4s-1/100000s
Illuminazione minima	0.03 Lux/F2.0, 30IRE, 0 Lux IR on
Portata IR	Fino a 30 m
IR On/Off	Auto / Manuale
LED IR	18
Pan/Tilt/Z	Pan: 0°-360° Tilt: 0°-90° Z: 0°-360°

Ottica

Tipologia	Fissa				
Montaggio	M12				
F	F2.0				
W	1.8 m				
DORI Distance	K	Detect	Observe	Recognize	Identify
	3.6mm	107 m	43 m	21 m	11 m

Video

Video Frame Rate	CVI: 4K@15fps; 5M@20fps; 4M@25fps/30fps CVBS: PAL/NTSC AHD: 4K@15fps; 5M@20fps; 4M@25fps/30fps TVI: 4K@15fps; 5M@20fps; 4M@25fps/30fps
Risoluzione	4K (3840×2160); 5M (2592×1944); 4M (2560×1440); 960H (960× 576/960×480)
Day/Night	Auto
BLC	BLC/HLC/WDR
WDR	W
Gain Control	Gain Control
Smart IR	Smart IR
Mirror	Mirror
Privacy Masking	4X
Mirror	Off/On
Privacy Masking	Off/On (8 aree, rettangolo)

Certificazioni

Certificazioni	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
----------------	---

Porte

ideo	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
------	--

Energia

imentazione	12V±30% DC
Assorbimento	Max 6W (12V DC, IR on)

Condizioni ambientali

em er at ra e midit e ercizio	C	C
Condizioni archiviazione	C	C
Protezione ingresso e antivandalò	IP67	

Struttura


Scocca	Metallo
Dimensioni	164.7×70×71.6 mm
Peso netto	380 g
Peso con confezione	460 g

Info per l'ordine

Articolo	Part Number	Descrizione
Telecamera 4K	DH-HAC-HFW1801SP-0280B	4K HDCVI IR Bullet Camera
	DH-HAC-HFW1801SN-0280B	
	DH-HAC-HFW1801SP-0360B	
	DH-HAC-HFW1801SN-0360B	
	DH-HAC-HFW1801SP-0600B	
	DH-HAC-HFW1801SN-0600B	
Accessories	PFA134	Water-proof Junction Box (wall mount)
	PFA134+PFA152-E	Water-proof Junction Box+Pole Mount Bracket (pole mount)
	PFM321	12V 1A Power Adapter
	PFM320	12V 2A Power Adapter
	PFM320D-015	12V 1.5A Power Adapter

Accessori

Opzionali

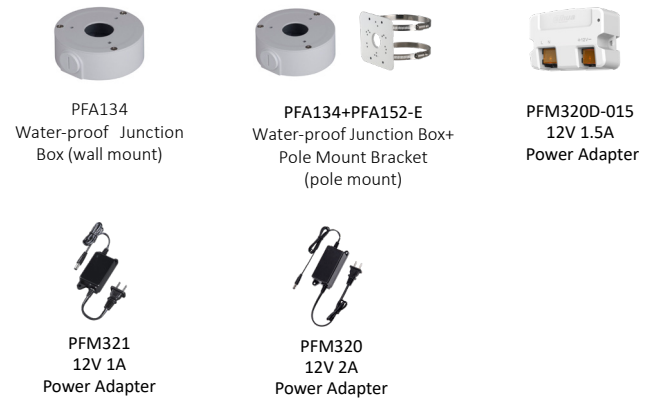

Junction Mount	Ceiling Mount	Pole Mount
PFA134	—	PFA134+PFA152-E

Dimensions (mm/inch)

