


# DHI-PHGOA8-EH

Outdoor Fixed LED

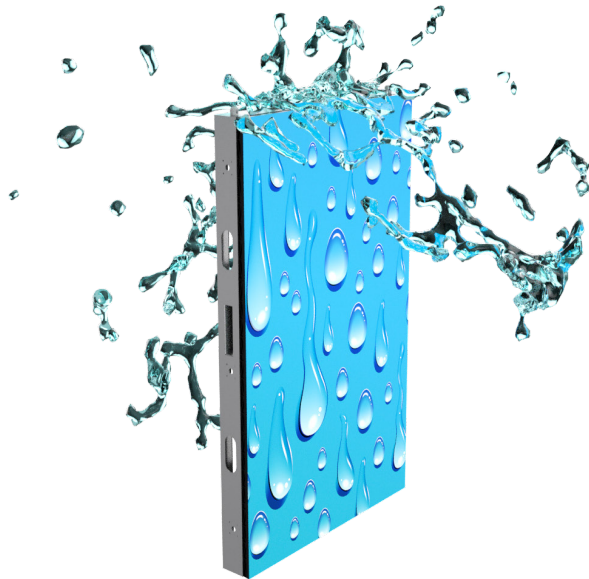

## Features :

- Super thin and light design: 98mm and 15.3kg/panel.
- Support front&rear installation and maintenance.
- Module adopts the triple waterproof design of imitation automobile door-type double-layer negative pressure precision aging waterproof ring.
- Support wall mounting without steel structure to save cost.
- Adopt connection pin design for reliable signal and quick dismantling.



## Technical Specification

### Model

Model	DHI-PHGOA8-EH
-------	---------------

### Parameters

Pixel Pitch	8mm
Pixel Configuration	1R1G1B
LED Type	SMD3535
Brightness	≥5500 cd/m <sup>2</sup>
Viewing Angle	H140°/V100°
Pixel Density	15,625 dot/m <sup>2</sup>
Module Size	320x320 mm
Cabinet Size	640mmx960mm
Cabinet Weight	15.3kg
Gray Level	65536
Area	0.6144m <sup>2</sup>
Material	Aluminum Alloy
Aspect Ratio	2:3

Ingress Protection	Front IP65/Rear IP55
Operating Temperature/ Humidity	-20°C~+40°C/10~90%RH
Pixels per Cabinet	80x120 pixels
Processing Depth	16 bits
Brightness Control	Manual/Automatic
Contrast Ratio	4000:1
Frame Rate	50/60 Hz
Refresh Rate	≥3840 Hz
Input Voltage	220V AC
Input Power (max)	700W/m <sup>2</sup>
Input Power (typical)	300W/m <sup>2</sup>
Installation	Fixed
Maintenance Mode	Front&Rear Maintenance
Data Interconnection	CAT5 Cable ( L≤100m ), single mode fiber ( L≤10km )